



FM80-N

icemachinesdirect 
EUROPEAN MACHINES LOWEST PRICES GUARANTEED

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air cooled
- Easily accessible components
- Low power and water consumption
- Direct transmission
- Reduced dimensions
- Continuous production
- Refrigerant R290



Internal bin capacity




Type of ice

Mojo Ice



Residual water content 8%



Voltage

230/50/1 Standard version

Machine dimensions

Net size WxDxH	529 x 626 x 880 mm
Net weight	52 kg
Shipping size WxDxH	600 x 690 x 960 mm
Shipping weight	59 kg

Technology and Certifications




**Factory 12, Sandown Square
56 Smith Rd
Springvale Vic 3171**



FM80-N

icemachinesdirect
EUROPEAN MACHINES LOWEST PRICES GUARANTEED

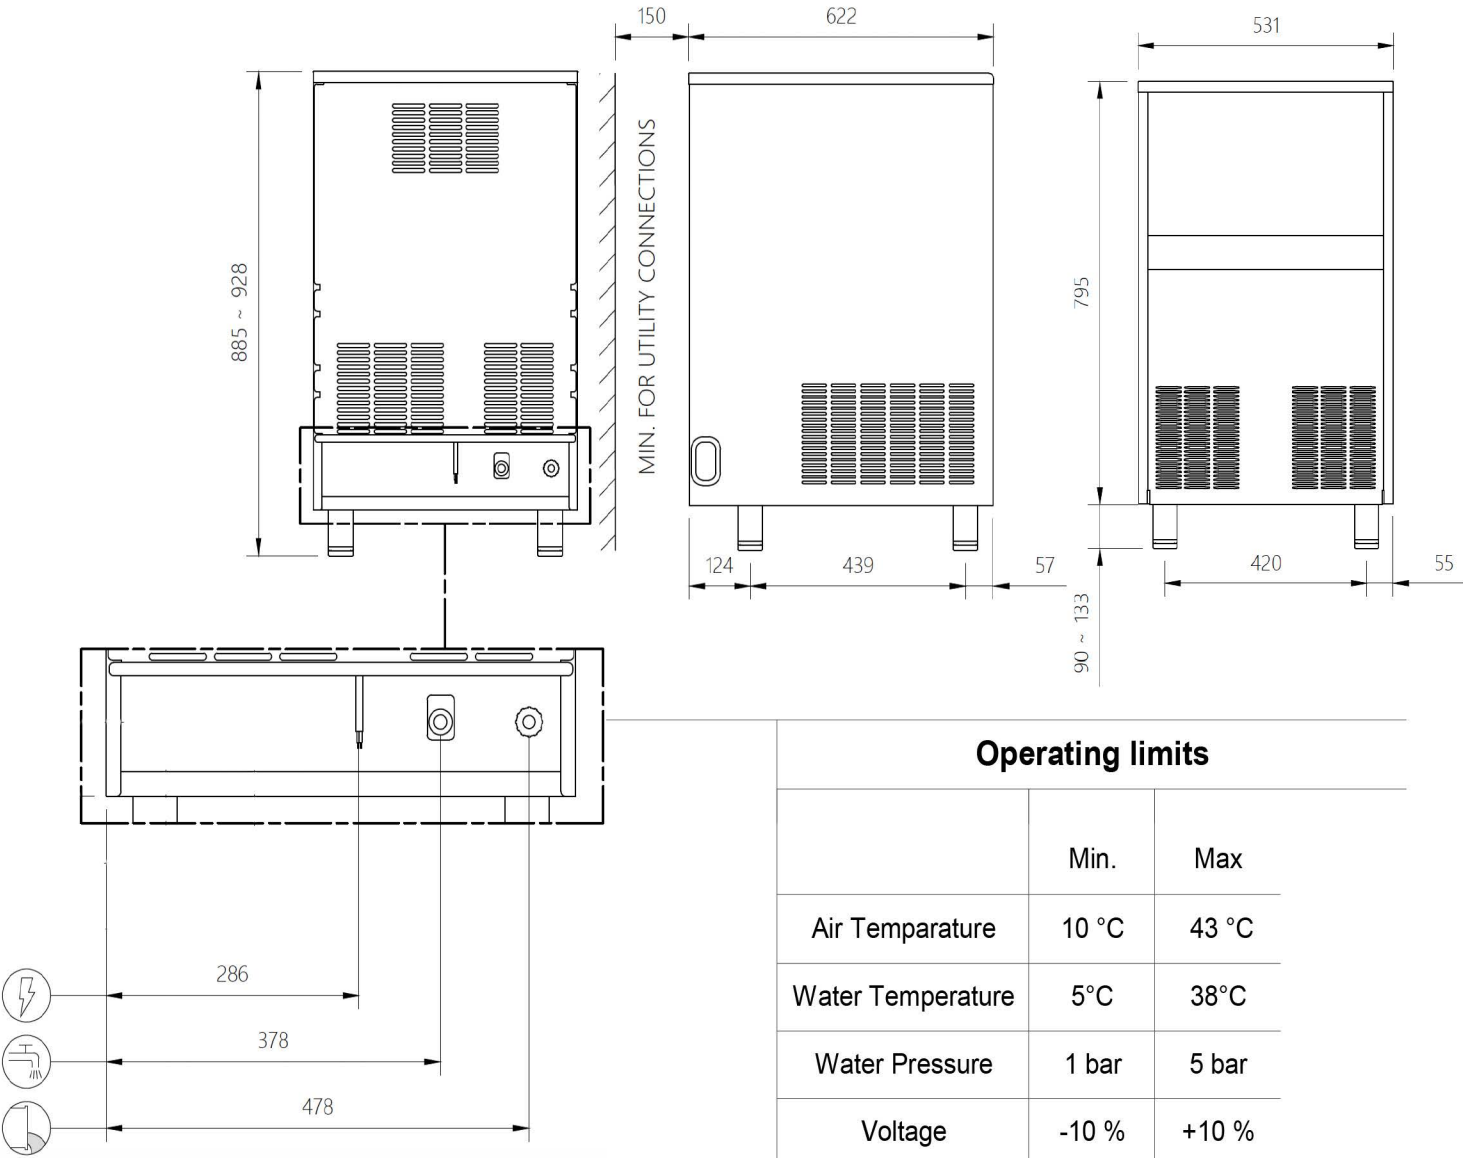

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/ 100kg	kWh/ 24h	Water l/h
FM80-N	230/50/1	70	68	275	R290	0,099	10	10,6	6,2	2,4

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water