



HOSHIZAKI

KM-40C HC DRAIN PUMP Crescent 41kg Ice Maker - Self Contained


Model Number
91000915

PRODUCT FEATURES

- Individually shaped crescent ice.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver® technology includes a double-sided evaporator, uniquely crafted in stainless steel, which produces ice on both sides, resulting in more ice in less amount of time.
- EverCheck™ Control Board with audible alarm and diagnostic features, designed to assist service technicians in diagnosing problems.
- Accessible digital operation panel allows for easy identification of operation status and cause of faults.
- Automated cleaning function makes cleaning simple and saves time.
- Durable stainless-steel exterior.
- Easily removable & cleanable air filters on front panel.
- Accessories: Manual, Scoop, check valve, Hex Bolt legs and 150mm adjustable legs included (water filter and optional hex bolt legs sold separately)



TECHNICAL DRAWING

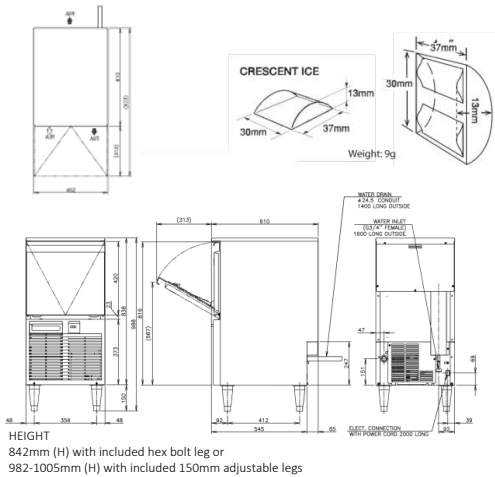

PRODUCT SPECIFICATION

Production Capacity / 24hrs Approx. 41kg @ 21°C Air temp; 15°C Water
Approx. 33kg @ 32°C Air temp; 21°C Water

Max Storage Capacity Approx. 16kg

Freeze Cycle Time Approx. 23 Min (At: 21°C Air ; 15°C Water)

Ice Production / cycle Approx. 0.71kg/80pcs

Dimensions 452mm (W) x 610mm (D) x 842mm (H)
including hex bolt legs
988mm (H) with 150mm adjustable legs

Cooling Air

Weight Net/Gross (kg) 39/49

Refrigeration System Forced Air Circulation

AC Supply Voltage 1 PHASE 220-240V 50Hz / 10amp Plug

Amperage Running: 1.4A Starting: 7.7A

Refrigerant Charge R290/68g

Operating Conditions:

Ambient Temp 7-38°C

Water Supply Temp 7-32°C


Water Supply Pressure 0.07-0.8MPa (0.7-8bar)

Voltage Range ±6%

Electrical consumption Rated Motor: 220W (Power Factor: 69%)

Water Consumption / 24hrs Approx. 0.12m³/d(AT. 21°C ; WT 15°C)

DRAIN PUMP

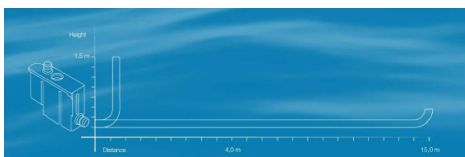

*As height increases, the discharge distance decreases in a directly proportional manner.

- Pump out Drain - Maximum height (H) 1.5metres at length (L) 5metres, Maximum height (H) .5metres at length (L) 15metres,
- Reduced installation time: Internal drain pump simplifies installation task.
- Plug and play efficiency: Easy drain connection without complications.



For free 6 month extended warranty, register online within 4 weeks of purchase date.

hoshizaki.com.au

INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- /የዘላለማዊ ጥጥር ማስወገጥ ለማድረግ ለውጭ ምጣኔ ማስተካከል ተጨማሪ ማስተካከያ ይገባል
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

*Refer to manual for full installation & maintenance requirements.

Descriptions and specifications are subject to change at any time, without notice.
Illustrations for demonstration purposes. Copyright © 2023 Hoshizaki Lancer Pty Ltd. All right reserved.