



# HOSHIZAKI

# KM-60C HC

Crescent 52kg Ice Maker - Self Contained

Model Number  
91000148




NATURAL  
REFRIGERANT

## PRODUCT FEATURES

- Individually shaped crescent ice.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver® technology includes a double-sided evaporator, uniquely crafted in stainless steel, which produces ice on both sides, resulting in more ice in less amount of time.
- EverCheck™ Control Board with audible alarm and diagnostic features, designed to assist service technicians in diagnosing problems.
- Accessible digital operation panel allows for easy identification of operation status and cause of faults.
- Automated cleaning function makes cleaning simple and save time.
- Durable stainless-steel exterior.
- Easily removable & cleanable air filters on front panel.
- Accessories: Manual, Scoop, check valve, Hex Bolt legs and 150mm adjustable legs included (water filter and optional hex bolt legs sold separately)



## TECHNICAL DRAWING

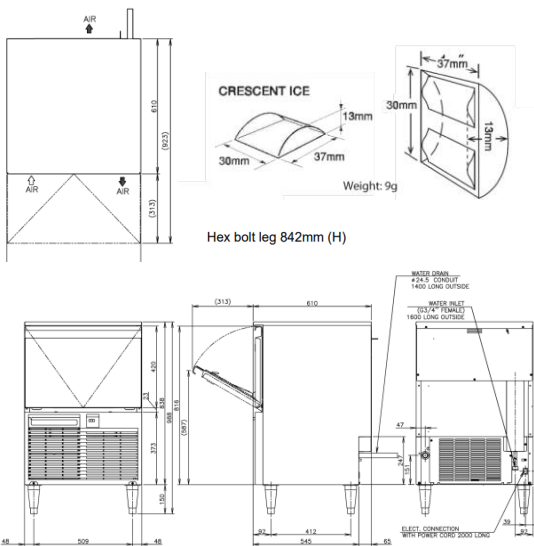

## PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 52kg @ 21°C Air temp; 15°C Water Approx. 37kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 23kg
Freeze Cycle Time	Approx. 26 Min (At: 21°C Air ; 15°C Water)
Ice Production / cycle	Approx. 0.96kg/110pcs
Dimensions	605mm (W) x 610mm (D) x 988mm (H) (982-1005mm (H) with 150mm adjustable legs)(842mm (H) with hex bolt leg)
Cooling	Air
Weight Net/Gross (kg)	45/57
Refrigeration System	Forced Air Circulation
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10amp Plug
Amperage	Running: 1.6A Starting: 8.5A
Refrigerant Charge	R290/90g
<b>Operating Conditions:</b>	
Ambient Temp	7-38°C
Water Supply Temp	7-32°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%
Electrical consumption	Rated Motor: 255W (Power Factor: 63%)
Water Consumption / 24hrs	Approx. 0.14m³/d(AT. 21°C ; WT 15°C)



For free 6 month extended warranty, register online within 4 weeks of purchase date.  
[hoshizaki.com.au](http://hoshizaki.com.au)

## INSTALLATION REQUIREMENTS

- Qualified plumber required for installation.
- Allow 15cm clearance at rear, sides and top for proper air circulation and ease of maintenance.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable s cations.

\*Refer to manual for full installation & maintenance requirements.

