


0

PRODUCT FEATURES

- Individual premium crescent cube with no ice bridging.
- Exceptionally hard crystal-clear cubes that melt slowly.
- Durable stainless-steel exterior.
- · Slide in air filter at front for easy cleaning-maintaining performance efficiency.
- Double-sided stainless-steel evaporator for all water conditions -produces more ice in less cycles.
- Flush mount to rear wall.
- · Good in hard water areas.
- Snap in water tank design easy to remove for sanitization.
- · Low electrical consumption.
- Low water consumption.
- LED lights and audible alarms.

TECHNICAL DRAWING

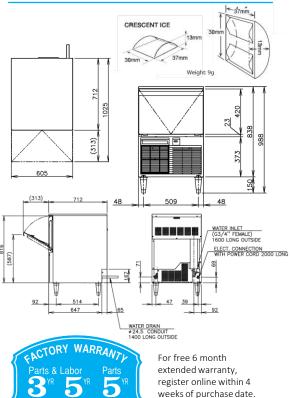











hoshizaki com au

PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 68kg @ 21°C Air temp; 15°C Water Approx. 55kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 34kg
Freeze Cycle Time	Approx. 23 Min (At. 21°C Air ; 15°C Water)
Ice Production / cycle	Approx. 1.15kg/130pcs
Dimensions	605mm (W) x 712mm (D) x 988mm (H)
Cooling	Air
Weight Net/Gross (kg)	50/63
Refrigeration System	Forced Air Circulation
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10amp Plug
Amperage	Running: 2.1A Starting: 12.5A
Refrigerant Charge	R290/147g
Operating Conditions:	
Ambient Temp	7-38°C
Water Supply Temp	7-32°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%
Electrical consumption	Rated Motor: 314W (Power Factor: 65%)
Water Consumption / 24hrs	Approx. 0.18m3/d(AT. 21°C; WT 15°C)

INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- · Hoshizaki recommends the use of a compatible water filterto prevent non-warrantable scale & sediment complications.

^{*}Refer to manual for full installation & maintenance requirements.