



FM605

icemachinesdirect 
EUROPEAN MACHINES LOWEST PRICES GUARANTEED

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct trasmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production
- Refrigerant R290



Matching bins

Machine	Bins		kg

Voltage

230/50/1 Standard version

Technology and Certifications



Type of ice

Flake ice



Residual water content 15 %

Machine dimensions

Net size WxDxH	538 x 663 x 790 mm
Net weight	94 kg
Shipping size WxDxH	610 x 760 x 960 mm
Shipping weight	103 kg

**Factory 12, Sandown Square
56 Smith Rd
Springvale Vic 3171**



FM605


icemachinesdirect

EUROPEAN MACHINES LOWEST PRICES GUARANTEED

REAR VIEW

SIDE VIEW

FRONT VIEW

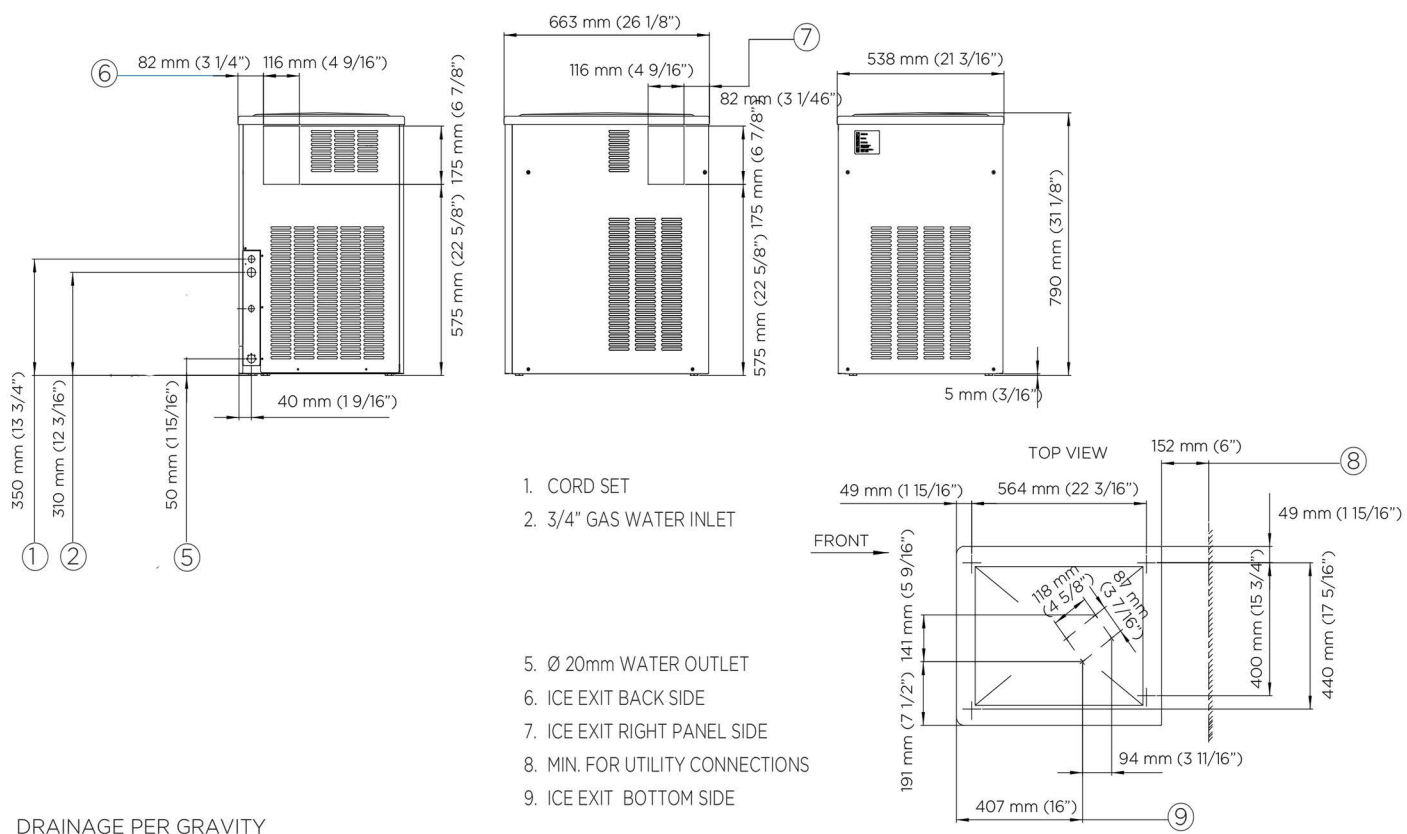

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg		Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h
FM605	230/50/1	410	-	1390	R290	0.150	10	30.4	-	11.7

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water