



FM255

icemachinesdirect 

EUROPEAN MACHINES LOWEST PRICES GUARANTEED



- FEATURES**
- Electronic control board with self diagnostic and malfunction alarms.
 - Resistant stainless steel exterior.
 - Easy, front panel access to technical / service area of the machine.
 - Continuous production
 - Direct trasmission
 - R290 refrigerant



CONDENSING SYSTEM Air cooled	RECOMMENDED BIN	
	BIN	KG

REFRIGERANT GAS R290	Factory 12, Sandown Square 56 Smith Rd Springvale Vic 3171	
VOLTAGE V/HZ/PH 230\50\1		

CERTIFICATIONS     	OPERATING REQUIREMENTS		
		Minimum	Maximum
	Air temperature	10	43
	Water temperature	5	38
	Water pressure	1 bar (14 psi)	5 bar (70 psi)
	Electrical voltage	-10%	+10%


Modular Ice Machine 199 kg



FM255

icemachinesdirect
EUROPEAN MACHINES LOWEST PRICES GUARANTEED

Modular Ice Machine 199 kg

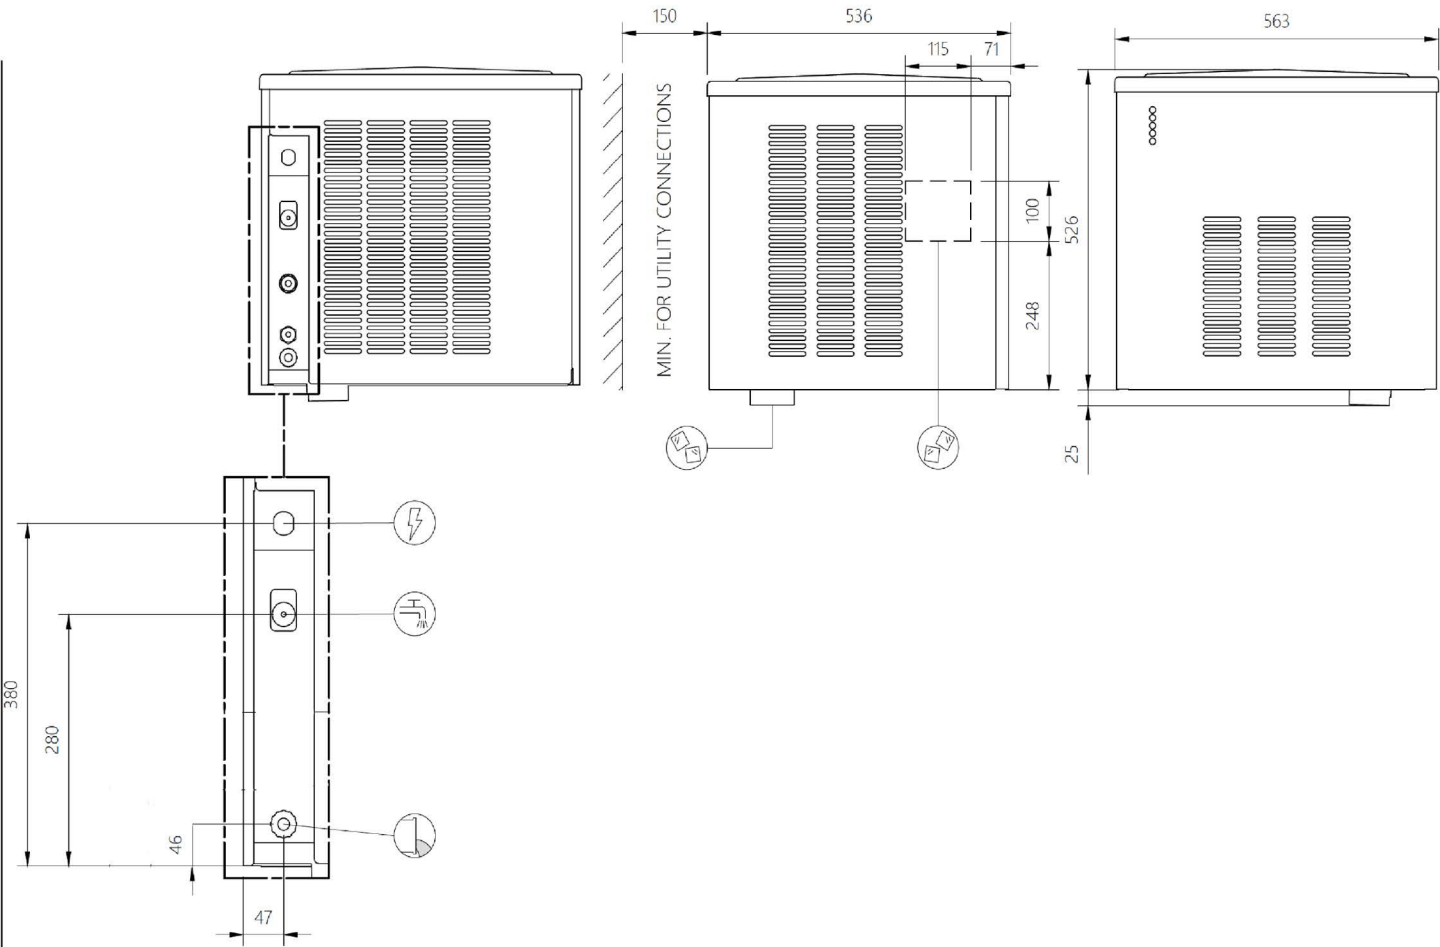

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			560 x 533 x 525 mm			Size (W x D x H)			680 x 610 x 630 mm		
Net weight			52 kg			Gross weight			56kg		
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
FM255	230\50\1	A	200	199	170	1,5	15	7	695	3 x 1,5	10